


Enquiry RK Easywork Workstation Configuration

Company:..... Customer code:.....
 Address:..... Location:.....
 Telephone:..... Telefax:.....
 Contact person:..... E-Mail:

Table version:


Static

Height: 750-1250 mm
 Width: 750-2000 mm
 Depth: 600-1200 mm




Mechanical height adjustment

Height: 830-1290 mm
 Width: 750-2000 mm
 Depth: 740-1200 mm



Electr. height adjustm-2 column system

Height:
 728-1038 mm
 773-1128 mm
 828-1235 mm
 873-1326 mm
 Width: 750-2000 mm
 Depth: 740-1200 mm



Electr. height adjustm-1 column system

Height: 660-1150 mm
 Width: 1100-1500 mm
 Depth: 740-800 mm





Table frame

Visual sides closed

4-On 4 sides grooves in profile

Table dimensions

1. Height _____
2. Width (Standard 1200/1600/2000 mm*) _____
3. Depth (Standard 800 mm) _____
4. Ground clearance of statical design Ausf. (50-300 mm) _____
5. Cross brace (only for static design) _____




* Standard for height adjustable one column system 1200 mm

Work desk

- Chip board coated, grey 23 mm
- Chip board coated, grey, 22 mm, melamine
- Beech, multiplex, oiled, 30 mm
- Beech, multiplex, oiled, 40 mm
- ESD-protective table top mat 900x610 mm 1220x610 mm

Visual cover

- Chip board, coated (melamine) grey
- Trespa silver grey
- Without panel element
- Left Right at the back

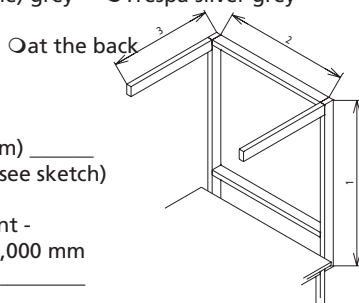

Gantry

1. Gantry height (1255-1500 mm) _____
2. Gantry width (internal side, see sketch) depends on the desk width.
For electric height adjustment - one-column system always 1,000 mm
3. Gantry depth (300-800 mm) _____


Gantry accessories:

- ___ pcs cup holder
- ___ pcs universal lamp 230 V
- ___ pcs swivelling grab container holder 1 rail
- ___ pcs swivelling grab container holder 3 rails
- Document holder 10 times, DIN A4
- Monitorholder LH Monitorholder RH

System lamps:

- Voltage 230 V (D,F,CH,GB) 110-230 V (US)
- Lamp -centre- Lamp -RH/LH-
- Lamps individually switchable (with this, the socket strip is absolutely required)

Socket strip

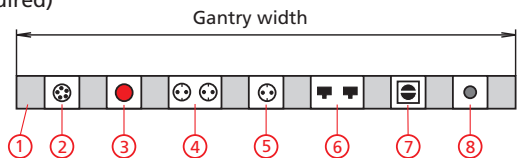

- Voltage 230 V (D) 230 V (F) 230 V (CH) 230 V (GB) 110 V (US)



- 1. Energy-supply channel _____ mm
 - 2. Number of sockets CEE 400 V ___ pcs
 - 3. Emergency stop
 - 4. Number of double sockets (0-2) ___ pcs
 - 5. Number of single sockets (0-4) ___ pcs
 - 6. Network terminal RJ 45
 - 7. On/Off-switch-sockets
 - 8. Number of pneumatic connections (0-2) ___ pcs Type NW-7.2
- Note: Maximum total load for all sockets 3.4 KW

Tool provision

- Runner profile
- Balancer (only in connection with a runner)
Range of supporting load
 0,3-1,5 kg 1,5-3,0 kg 3,0-4,0 kg

Grab container on gantry

- Rail system Material panels
- Rails in combination with perforated boards:
- RH (min table width >845 mm) LH (min table width >845 mm)



Centre (min table width >1335mm)

RH & LH (min table width >1040 mm)

