

If you want to strengthen your system... ...simple and universal combine your lightweight connections



Feature:

- ✓ simple assembly
- ✓ axial and rotation locking
- ✓ retrofit at existing systems and structures possible

The new reduction sleeves from RK Rose+Krieger now allow these lightweight systems to be easily extended with the aluminium clamp connectors and tubes from the RK Rose+Krieger Solid Clamps system. The 28 adapter sleeve reduces the 30 mm internal diameter of the aluminium clamp to the standard 28

mm tube size. In this way, it allows for a direct connection between the two systems, giving the user greater freedom with regards to a system design. Up until now, it was not possible to combine the two systems. But thanks to the new adapter sleeves, users can now connect up 28 mm

lightweight systems that use sheet metal connectors and Solid Clamps from RK Rose+Krieger. The reducing bushes are very easy to mount and have axial and rotation locking. This alternative gives the user the benefit of the considerably greater variety that the Solid Clamps system from RK Rose+Krieger offers.




Adapter Sleeve R28



Simple adaption of the tube connection systems

The reducing sleeves couldn't be easier to mount.

Push the sleeve in the RK-tube connector, set up the clamping screw (the sleeve is now safe against axial movement and twisting), the tube with Ø 28 mm can be now connected – Done!

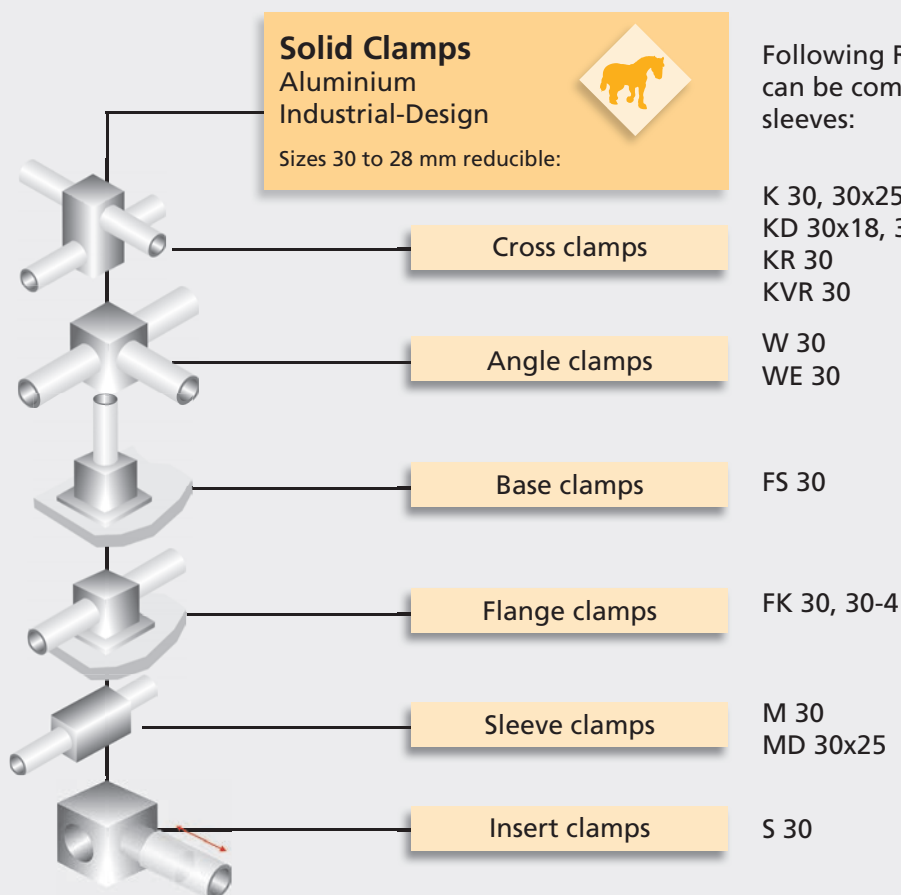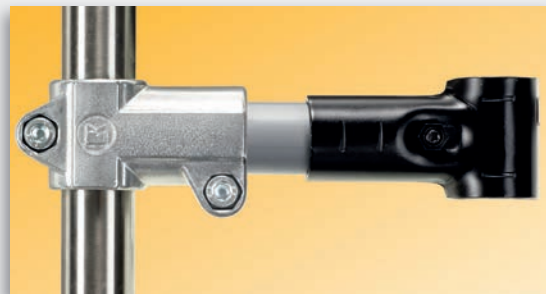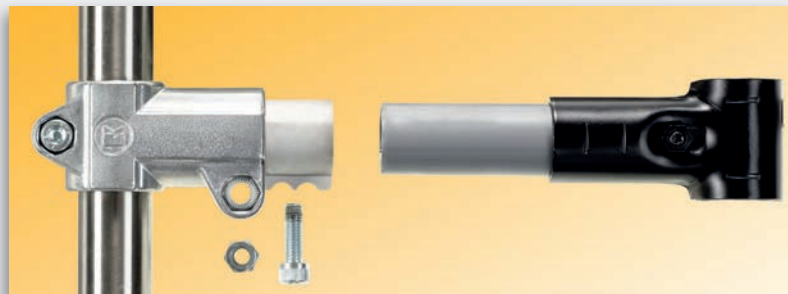

Following RK-tube connectors can be combined with adapter sleeves:

- K 30, 30x25, 30x20
- KD 30x18, 30x16, 30x15, 30x14, 30x12
- KR 30
- KVR 30
- W 30
- WE 30
- FS 30
- FK 30, 30-4
- M 30
- MD 30x25
- S 30

The adapter sleeves for three diameter ranges

The adapter sleeves for three diameter ranges, since the dimensions of 28 mm tubes can vary from one manufacturer to another:



Code No.	Type	for diameter	Packaging
91313	Type 1	28,4 - 28,8 mm	5 Pcp.
91314	Type 2	28,0 - 28,3 mm	5 Pcp.
91315	Type 3	27,5 - 27,9 mm	5 Pcp.

MAR 12 10 15 0005 06/2014